





ANTARES

SRB - Frižideri velike zapremine, idealni za restorane i menze, u potpunosti obloženi nerđajućim čelikom AISI 304 18/10.

- Izolacija je izvedena poliuretanskom penom, debljine 50-60 mm, za 0°C / +10°C i -2°C / +10°C režim, ubrizgane direktno u konstrukciju.
- Vrata frižidera su reverzibilna, sa ručkama postavljenim iznutra, kako bi se izbegla izbočenja bilo kakve vrste, sa automatskim zatvaranjem za uglove otvaranja manje od 90° i blokadom u poziciji otvaranja za uglove otvaranja višeg stepena. Postoji mogućnost montiranja šarki po sredini da bi se omogućilo levo i desno otvaranje vrata.
- Na vratima se nalaze magnetne zaptivke, sa opcijom zamene.
- Unutrašnje dimenzije za poslužavnike i rešetke su prema 2/1 gastronomskom standardu sa vodičama od nerđajućeg čelika.
- Dno je sa zaobljenim ivicama, kako se olakšava operacija čišćenja.
- Podešavajuće nogice su od nerđajućeg čelika.
- U modelima sa prinudnim hlađenjem isparavanje odmrznute vode se vrši automatski električnim grejačem.
- Digitalni kontrolni panel, Eliwel ili Dixell, su vrlo jednostavnii za upotrebu omogućavaju podešavanje od strane korisnika.
- Ekološki gas R134a, R290, R600a ili R452A.
- Veliki izbor dodatne opreme na zahtev kupca.
- Specifični modeli za ribu, meso i sladoled.
- Vrata se rade u varijantama od inox-a i stakla.
- Ambijetalna temperatura +43°C.

GB - Refrigerated reach-in cabinets, ideal for restaurants and the community, entirely coated in stainless steel AISI 304 18/10.

- Thickness of the insulation is 50-60 mm, for 0°C / +10°C and -2°C / +10°C, of polyurethane foam injected directly in the mold.
- Reversible doors, with handle inserted on the inside in order to avoid any protuberances, with an automatic closing for opening angles less than 90° and for blockage in the open position for opening angles of a higher degree. Option for mounting hinges in the middle for left and right door opening.
- Doors with magnetic gaskets, easy replaceable.
- Interior dimensions for trays and grills according to the gastro norm 2/1 standard with support tracks in stainless steel.
- Bottom with rounded edges in order to facilitate the cleaning operations.
- Leveling feet in stainless steel.
- Automatic hot gas evaporation of the defrost water in the ventilated versions.
- Digital control panel, Eliwel or Dixell, extremely easy to use, permitting a personal command of the functions.
- Climate-friendly refrigerant R134a, R290, R600a or R452A.
- Vast line of accessories upon request.
- Available in specific versions for fish, meat and ice cream.
- Various glass/inox refrigerator door versions available.
- Ambient Temperature +43°C.

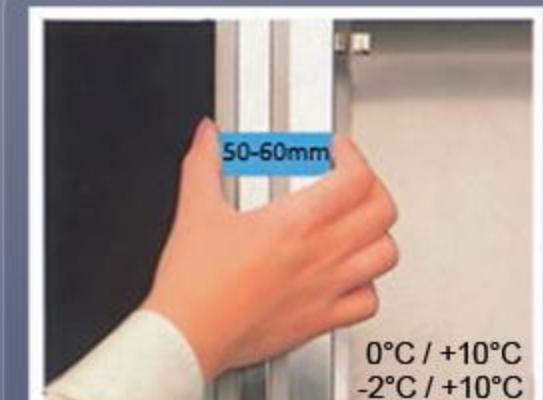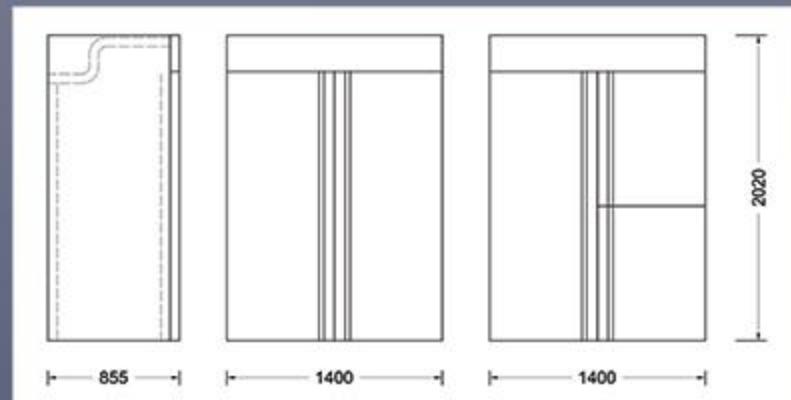

BELIM INDUSTRIES LTD
Svetozara Miletića 16
11000 Belgrade
Serbia
Tel: +381 11 33 92 064
Fax: +381 11 33 92 083
Site: www.belim.net
e-mail: office@belim.net



Tehničke karakteristike / Technical characteristics



	TN 1400	TN 1400 G
Neto kapacitet Net capacity	1400L	1400L
Temperatura Temperature	-2°C / +10°C 0°C / +10°C	-2°C / +10°C 0°C / +10°C
Napon / Snaga Voltage / Power	220V/50Hz/558W	220V/50Hz/558W
Ekološki gas Climate-friendly refrigerant	R134a, R290, R600a, R452A	
Težina neto/bruto Weight net / gross	213/248kg	213/248kg
Dimenzije neto/bruto Dimensions net / gross	1400x855x2020mm/ 1500x955x2225mm	1400x855x2020mm/ 1500x955x2225mm

Zadržavamo pravo izmene tehničkih podataka i karakteristika bez prethodnog obaveštenja.

Technical data and features subject to change without notice.