





# ANTARES

## **SRB - Frižideri velike zapremine, idealni za restorane i menze, u potpunosti obloženi nerđajućim čelikom AISI 304 18/10.**

- Izolacija je izvedena poliuretanskom penom, debljine 60-75 mm, za -18°C / -2°C i -22°C / -2°C režim, ubrizgane direktno u konstrukciju.
- Vrata frižidera su reverzibilna, sa ručkama postavljenim iznutra, kako bi se izbegla izbočenja bilo kakve vrste, sa automatskim zatvaranjem za uglove otvaranja manje od 90° i blokadom u poziciji otvaranja za uglove otvaranja višeg stepena. Postoji mogućnost montiranja šarki po sredini da bi se omogućilo levo i desno otvaranje vrata.
- Na vratima se nalaze magnetne zaptivke, sa opcijom zamene.
- Unutrašnje dimenzije za poslužavnike i rešetke su prema 2/1 gastronomskom standardu sa vođicama od nerđajućeg čelika.
- Dno je sa zaobljenim ivicama kako se olakšava operacija čišćenja.
- Podešavajuće nogice su od nerđajućeg čelika.
- U modelima sa prinudnim hlađenjem isparavanje odmrznute vode se vrši automatski električnim grejačem.
- Digitalni kontrolni panel, Eliwel ili Dixell, su vrlo jednostavnii za upotrebu omogućavaju podešavanje od strane korisnika.
- Ekološki gas R404a, R290, R452A ili R600a.
- Veliki izbor dodatne opreme na zahtev kupca.
- Specifični modeli za ribu, meso i sladoled.
- Vrata se rade u varijantama od inox-a i stakla.
- Ambijetalna temperatura +43°C.

## **GB - Refrigerated reach-in cabinets, ideal for restaurants and the community, entirely coated in stainless steel AISI 304 18/10.**

- Thickness of the insulation is 60-75 mm, for -18°C / -2°C and -22°C / -2°C, of polyurethane foam injected directly in the mold.
- Reversible doors, with handle inserted on the inside in order to avoid any protuberances, with an automatic closing for opening angles less than 90° and for blockage in the open position for opening angles of a higher degree. Option for mounting hinges in the middle for left and right door opening.
- Doors with magnetic gaskets, easy replaceable.
- Interior dimensions for trays and grills according to the gastro norm 2/1 standard with support tracks in stainless steel.
- Bottom with rounded edges in order to facilitate the cleaning operations.
- Leveling feet in stainless steel.
- Automatic hot gas evaporation of the defrost water in the ventilated versions.
- Digital control panel, Eliwel or Dixell, extremely easy to use, permitting a personal command of the functions.
- Climate-friendly refrigerant R404a, R290, R452A or R600a.
- Vast line of accessories upon request.
- Available in specific versions for fish, meat and ice cream.
- Various glass/inox refrigerator door versions available.
- Ambient Temperature +43°C.

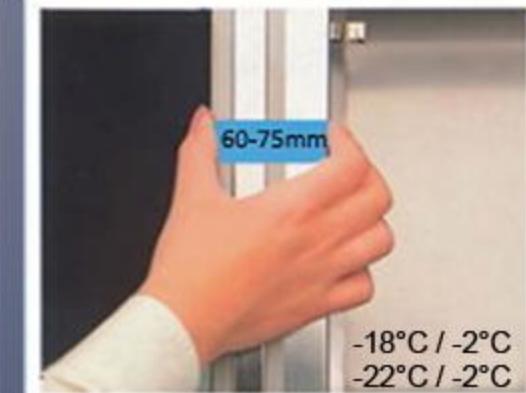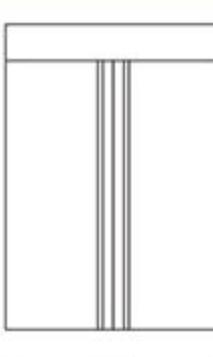

## Tehničke karakteristike / Technical characteristics



BT 1400

BT 1400 G

Neto kapacitet  
Net capacity

1400L

1400L

Temperatura  
Temperature

-18°C / -2°C

-18°C / -2°C

-22°C / -2°C

-22°C / -2°C

Napon / Snaga  
Voltage / Power

220V/50Hz/945W

220V/50Hz/945W

Ekološki gas  
Climate-friendly refrigerant

R404a, R290, R452A, R600a

Težina neto/bruto  
Weight net / gross

213/248kg

213/248kg

Dimenzijs neto/bruto  
Dimensions net / gross

1400x855x2020mm/

1400x855x2020mm/

1500x955x2225mm

1500x955x2225mm

Zadržavamo pravo izmene tehničkih podataka i karakteristika bez prethodnog obaveštenja.

Technical data and features subject to change without notice.

BELIM INDUSTRIES LTD  
Svetozara Miletića 16  
11000 Belgrade  
Serbia  
Tel: +381 11 33 92 064  
Fax: +381 11 33 92 083  
Site: [www.belim.net](http://www.belim.net)  
e-mail: [office@belim.net](mailto:office@belim.net)

